


EXHAUST EXTRACTORS



EXHAUST NOZZLES

Fumex complete range of exhaust nozzles for vehicle exhaust. If you have specific needs for exhaust extractors, please contact Fumex.

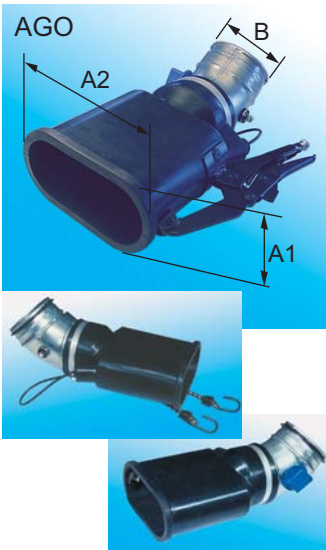

Oval rubber nozzle, AGO & AGOS

AGO and AGOS rubber nozzles with oval connection, that are easily connected to single and double exhaust pipes, up to 70 x 150 mm. Can be mounted with pliers, clamp or strap, co-socket has a diameter of 22 mm.
 - AGO without damper
 - AGOS with tight-fitting damper
 Temp. range: -30°C to +150°C
 Weight: approx. 1 kg

Article no.	A1 Ø mm	A2 oval	B mm
AGO-075(X)*	70	150x85	75
AGO-100(X)*	70	150x85	100
AGO-125(X)*	70	150x85	125
AGOS-075(X)*	70	150x85	75
AGOS-100(X)*	70	150x85	100
AGOS-125(X)*	70	150x85	125

*(X) T=Pliers K=Clamp S=Strap



Nozzle with pliers, AT & ATS

Nozzle with pliers with round opening. Manufactured of powder coated steel. Impact protection of rubber. Delivered with co-socket.
 - AT without damper
 - ATS with tight-fitting damper
 Temp. range: -30°C to +200°C
 Weight: 1.75-2.25 kg

Article no.	A mm	B mm
AT/ATS 125-100	125	100
125-125	125	125
AT/ATS *160-100	160	100
*160-125	160	125
*160-150	160	150
*160-160	160	160

* no co-socket




Nozzle with clamp, AK

Manufactured of powder coated steel. Impact protection of rubber. Delivered with co-socket and mounting straps.
 - AK without damper
 - AKS with tight-fitting damper
 Temp. range: -30°C to +200°C Weight: approx 1.5 kg

Article no.	A mm	B mm
AK/AKS-075	75	75
-100	100	100
-125	125	125
-150	150	150

The Fumex range also includes fans, accessories and automatic control units for exhaust extractors

FUMEX[®]
 EXHAUST EXTRACTORS
 Pure advantage

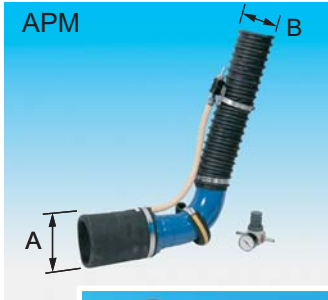

Pneumatic rubber nozzle, APM

Complete set that fits hose reels and exhaust arms of the ASA model.

The pneumatic nozzle is connected to the exhaust pipe by blowing compressed air into the manchette that then clamps to the pipe. The nozzle is delivered complete with pipe bend, approx 1 m hose, sliding valve and pressure regulator.

Temp. range: -30°C to +150°C Weight: approx 3 kg
The pressure to the manchette must be 0.8 bar at the most.


Pneumatic rubber nozzle, APMM

Pneumatic rubber nozzle.

Nozzle delivered with 12 mm straight air connection.
Temp. range: -30°C to +150°C Weight: approx 1.5 kg
The pressure to the manchette must be 0.8 bar at the most.
If you have applications at other temperatures, contact FUMEX.

Article no.	A mm	B mm
APM -100	100	75 alt. 100
APM -125	125	100 alt. 125
APM -160	160	125 alt. 150
APM -200	200	125 alt. 150

Article no.	A mm
APMM -100	100
APMM -125	125
APMM -160	160
APMM -200	200

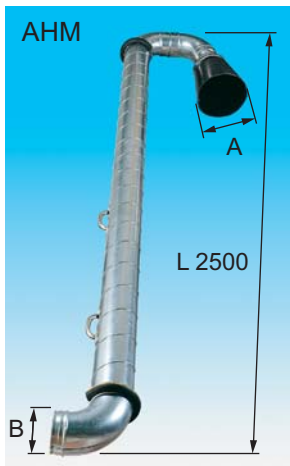

Nozzle and high mounted exhaust pipe, AHM

Manufactured of galvanized steel. Complete with lifting handle and impact protection. Rubber funnel of reinforced rubber sheet

Temp. range: -30°C to +150°C Weight: approx 8 kg

Article no.	A mm	B mm
AHM -100	250	100
AHM -125	250	125
AHM -160	250	160



Branch coupling, AGK

Branch coupling for double exhaust pipes. Branch pipe is manufactured of galvanized steel.

Hose AG: Flame-retardant, capable of carrying vehicles, suitable for vehicle exhaust. Complete with hose clamp. 1 m hose per branch

Article no.	A mm
AGK -075	75
AGK -100	100
AGK -125	125

Hose rupture protection, SB

Manufactured of aluminium and plastic. Delivered complete with female and male part.

Temp. range: -30°C to +200°C Weight: 1 kg

Article no.	A mm
SB -075	75
SB -100	100
SB -125	125
SB -150	150



Hose, AG

Flame-retardant, crush recoverable, suitable for vehicle exhaust. Heat resistant, rubberized fabric EPDM polyester. Spiral of EPDM coated polyester.

Hose lengths can be joined by screwing together.

Article no.	Hose Ø mm	Hose length m
AG-075	75	5 and 10
AG-100	100	5 and 10
AG-125	125	5 and 10
AG-150	150	5 and 10

Temperature range -40 to 170° C

Hoses with temperatures ranges up to +1200°C are included in the range

FUMEX®

Verkstadvägen 2, 931 61 SKELLEFTEÅ, Sweden
Tel.Int. +46 910-361 80, Fax.Int. +46 910-130 22
www.fumex.com info@fumex.se