



Flextraction Limited
10 Digby Drive · Melton Mowbray · Leicestershire · LE130RQ
Tel: +44 (0) 1664 410641 · Fax: +44 (0) 1664 480244
E-mail: sales@flextraction.co.uk
www.flextraction.co.uk

DOWNDRAUGHT BENCH FB1320




DOWNDRAUGHT BENCH FB1320



Flextraction Limited
10 Digby Drive · Melton Mowbray · Leicestershire · LE130RQ
Tel: +44 (0) 1664 410641 · Fax: +44 (0) 1664 480244
E-mail: sales@flextraction.co.uk
www.flextraction.co.uk


The FB1320 downdraught filter bench is designed for light dust applications such as grinding, fettling, de-burring etc and is available in standing or seated configurations.



Aluminium mesh filter
Used in conjunction with spark arrestor (optional)




Spark arrestor
For grinding applications (optional)



Pre-filter
G4 Pleated pre filter to remove particulate



Manual Motor Starter
Starter and overload combined in one switch for ease of wiring



Fan
600w high power centrifugal fan. Running current 6.8A (max)
230v 50/60Hz 1pH


TECHNICAL DATA

Air Volume (max)	5000m ³ h (free blowing)
Velocity	2.0m/s (clean filter)
Motor rating	600w
Current (max)	6.8A
Supply	230v 50/60Hz 1pH
Weight	220Kg

FINISH

- RAL 7035
- Wide range of other colours available
- Built to CE Standards
- Bespoke sizes are available

DIMENSIONS

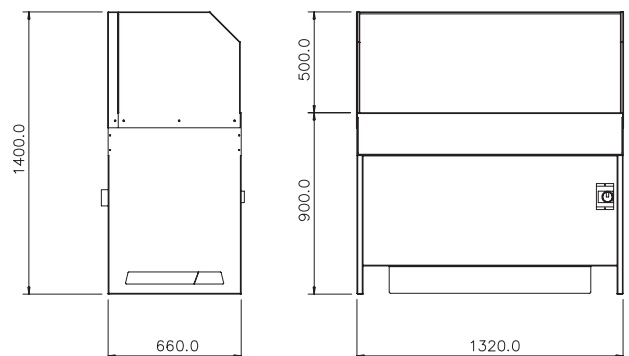

DOWNDRAUGHT BENCH FB1320